

DSX180D



Intellivox Series - Active Beam Shaping, Self Powered, Loudspeaker Array

SPEC SHEET



KEY FEATURES ■

- Speech Intelligibility with Expanded Frequency Response
- Slim Unobtrusive Design
- Vertical Beam Shaping (DDS Technology)
- Wide Horizontal Dispersion
- AVC (Automatic Volume Control) via built-in ambient mic
- 32-bit floating point DSP

HIGHLIGHTS ■

Part of JBL's Intellivox range of column speakers, DSX180D is an active beam shaping loudspeaker array best suited for smaller less reverberant environments where speech intelligibility and full-range frequency response is required.

It features our highly advanced Digital Directivity Synthesis (DDS) beam shaping algorithm. This allows custom shaping of the directivity pattern for the JBL Intellivox arrays to produce a beam which is tailored to precisely match the audience area within the space in which they are installed. As a result, the sound is aimed directly where it is needed – straight at the listener while avoiding the hard, reflective surfaces.

It features ten custom designed, 4" full-range loudspeakers and four 1" horn loaded dome tweeters driven by eight 40W class-D amplifiers. The horizontal coverage is 130° whereas the vertical coverage can be adjusted using DDS algorithm. DSX180D can cover an area of up to 25 m while maintaining an even sound pressure over the audience area.

The onboard eight-channel, 32-bit floating-point DSP delivers powerful processing capabilities, including an 8-band parametric equalizer, compensation filters, up to 20 seconds of delay, a limiter, and volume control—equipping installers with all the tools needed for precise system setup. DSX180D also features AVC (Automatic Volume Control) via built-in ambient mic, ensuring a consistent sound level for the listener.

The unit is controlled using our proprietary WinControl software which offers user friendly control of the beam steering parameters, audio processing and surveillance features. Remote monitoring of parameters like status of the DSP, amplifiers and loads, external pilot tone, status of the ambient noise sensing microphone, chassis temperature, ambient temperature, and control for the input section is available.

The dome tweeters in the DSX units not only improve the horizontal coverage at high frequencies but also enhance the subjective sound quality of the system for both speech and music. Its modest array length makes the DSX180 suitable for easy and unobtrusive implementation in even the most architecturally sensitive environment. It also can be used as a 'fill system' in larger Intellivox installations, providing coverage in shadow zones. The low frequency response of the system can be easily extended using a JBL subwoofer system.

The speaker accepts both Analog line level balanced audio and DANTE input with 8 x 8 Audio channels.

The auto ranging power supply is suitable for use across the globe accepting voltages from 115 to 230VAC.

DSX180D has a steel enclosure coated with an epoxy which is available by default in white (RAL9010) and can also be ordered in custom colour.

DSX180D



Intellivox Series - Active Beam Shaping, Self Powered, Loudspeaker Array

SPEC SHEET

SPECIFICATIONS ■

ACOUSTICAL

Frequency Response (± 3 dB) ^{1,2} :	130 - 18 kHz (+/-3 dB)
Coverage Pattern:	130° Horizontal x Adjustable Vertical
Max SPL ³ :	89dB Continuous, 92dB Peak (A-weighted at 30m)
Dynamic Range ⁴ :	>100dB
Transducers:	10 x 4" Full-Range, 4 x 1" horn loaded dome tweeter
Typical Throw:	25m

AUDIO INPUT

Analog Input Type:	Transformer Balanced Line Level
Connectors:	3-way Phoenix
Maximum Peak Input Level:	+19dBV peak (+21.22 dBu)
Input Impedance:	6.8k Ω
Digital Input Type:	DANTE
Connectors:	Two 8p RJ-45 (Primary & Secondary)

AMPLIFIER

Type:	Class D
Continuous Power:	8 x 40W RMS (4 Ohm)
Peak Power:	390W

DSP

Sample Rate:	48.0 kHz (default)
Bit Depth:	32-bit Floating point
Latency ⁵ :	3.7 ms
A/D, D/A Converter:	24 bits (128 x oversampling)
Signal Processing:	21 sec (pre-delay) 2 x 10 sec (input channel delay) Equalizer and Compensation filtering Volume RMS and Peak limiters on each output Ambient Noise Sensing Autogain (fail-safe) 8 x Output filters + Delay Ring buffers

CONTROL

Network Interface Type:	Ethernet through Dante
Connector:	8p RJ-45
Fault Monitoring ⁶ :	Failure relay SPDT 125 mA / 24 V
Connector:	2-way Phoenix
Fan Control:	For optional external fan (24VDC / 3W max)
Connector:	2-way Phoenix

DSX180D



Intellivox Series - Active Beam Shaping, Self Powered, Loudspeaker Array

SPEC SHEET

SPECIFICATIONS (Cont.) ■

AC POWER	
Mains Voltage Range:	115V to 230V
Connector:	3p IEC
Max mains inrush current:	25 A short-time peak (230 V)
Current Draw ⁷ :	58 VA (idle) / 220 VA (male speech STIPA) / 408 VA (full load)
GENERAL	
Enclosure Material:	Steel
Colour:	Enclosure and grill RAL9010 (White) Speaker Baffle RAL9011 (Black)
Dimensions (H x W x D) ⁸ :	1780 x 134 x 92mm (70.1 x 5.3 x 3.6 inch)
Temperature Range:	0 to 40 °C (32 - 104 °F)
Net Weight:	19kg (42 lbs)
Shipping Weight:	22kg (48.5 lbs)
Environmental Standards:	CE, CSA/UL, CCC Safety EN 62368-1:2014+A11:2017 EMC EN 55032:2012/AC:2013 class A EMC EN 55103-2:2009 Mains harmonics EN 61000-3-2:2014
Included Accessories	Wall Bracket (25 mm); connector set Swivel Bracket 90° Swivel Bracket 45° Cover Plate
Optional Accessories	Hinge Bracket 90° Cover Box 58 mm Program Set Universal USB

Notes:

1. Measured outside under semi-anechoic 'full-space' conditions with typical filter and delay settings unless stated otherwise.
2. Data is determined from 1/3 octave averaged data measured on-axis. The frequency response of the complete array is depending on the actual signal processing parameters and air absorption (at larger distances).
3. Levels are valid for pink noise (100 to 20 kHz bandwidth) with a crest factor of 3 dB. Default EQ and minimum opening angle setting. 'Continuous' is the RMS level, 'Peak' is the absolute peak level, both determined at the onset of the output limiters.
4. For this measurement the signals at all power amplifier outputs are summed together. Measured as the A-weighted difference (in dB) between the maximum rms level (with pink noise input signal) and the noise output (with no input signal present).
5. Minimum latency due to hardware and frame processing from analogue input to amplifier output.
6. For volt-free operation COM is connected to NC if the device is switched-on and has no failure.
7. Defined as the rms mains current multiplied by the rms mains voltage under normal operating conditions. 'Full load' figures are maximum values measured with a pulsating pink noise input signal.
8. Depth of enclosure only, without mounting brackets.

Note: SPL values will vary depending upon opening angle, DDA should be used to verify SPL values for each individual installation.


DSX180D



Intellivox Series - Active Beam Shaping, Self Powered, Loudspeaker Array

SPEC SHEET

DIMENSIONS ■

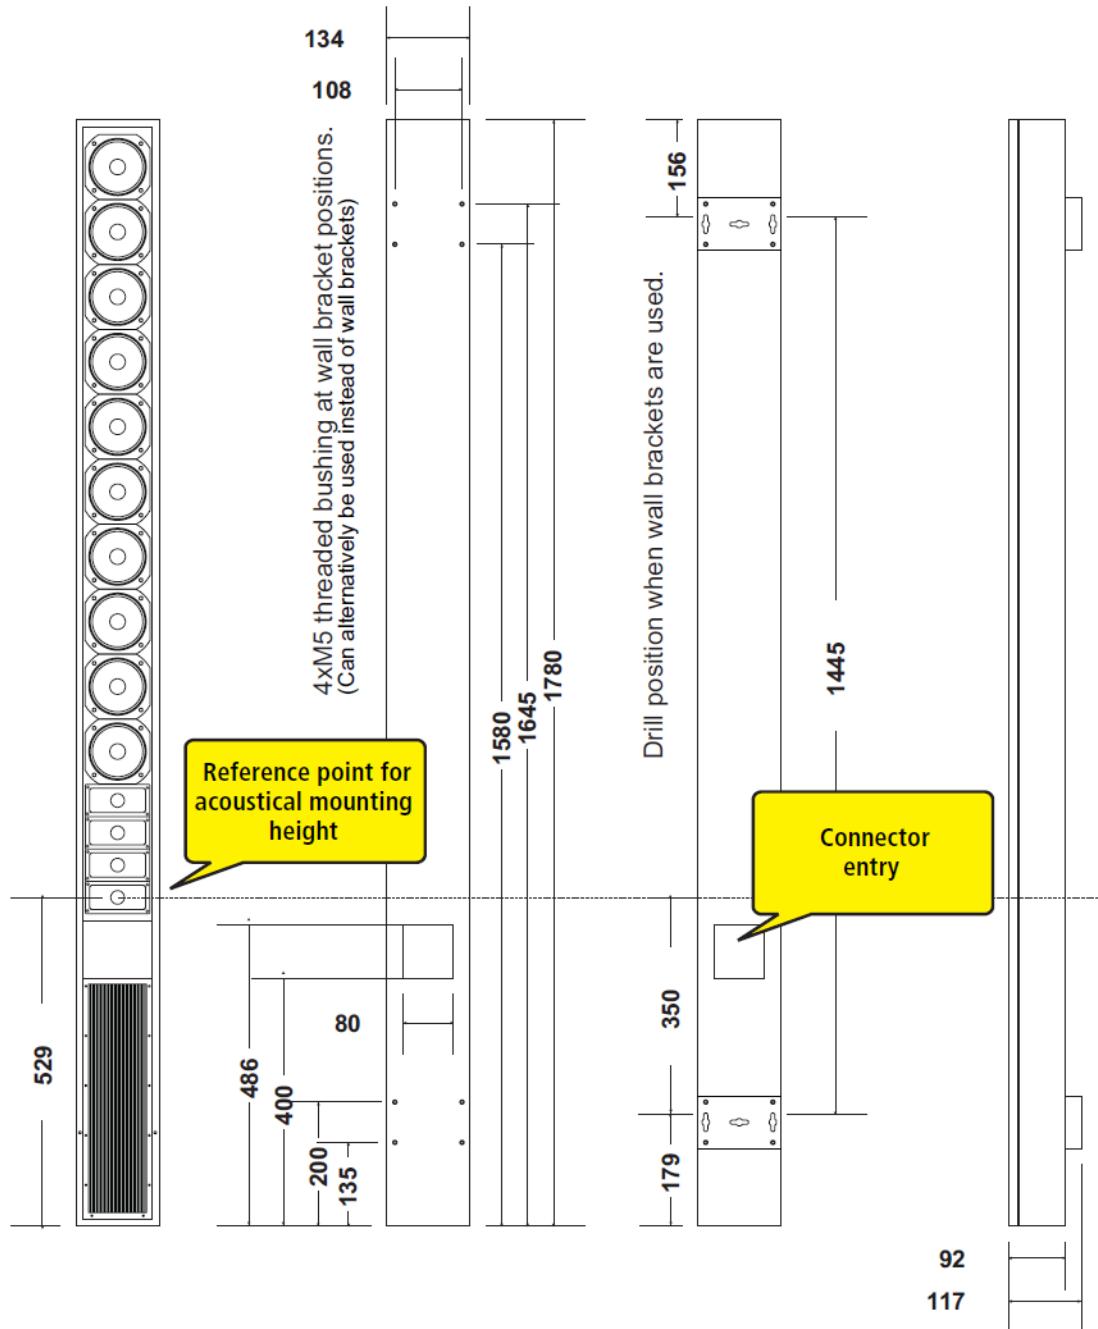

This drawing is valid for the default 'amp-at-bottom' version - Order SKU: JBL-DSX180D-B


DSX180D

The logo for JBL Professional, featuring the letters 'JBL' in a bold, white, sans-serif font inside a red square. Below the square, the word 'PROFESSIONAL' is written in a smaller, white, sans-serif font.

Intellivox Series - Active Beam Shaping, Self Powered, Loudspeaker Array

SPEC SHEET

DIMENSIONS ■

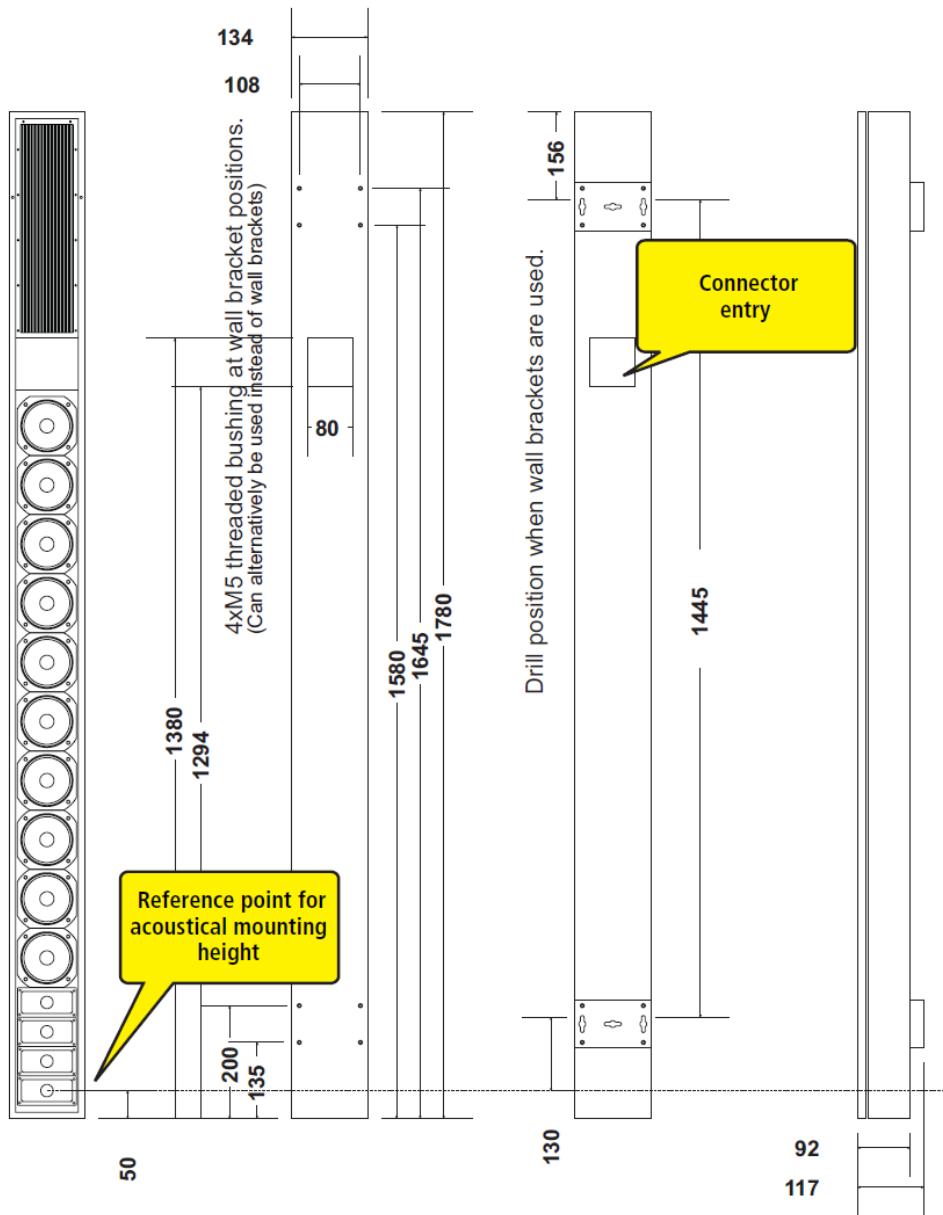

This drawing is valid for the 'amp-at-top' version - Order SKU: JBL-DSX180D-T



HARMAN Professional Inc. 8500 Balboa Blvd. Northridge, CA 91325 USA

© 2026 HARMAN International Industries, Incorporated. All rights reserved.
Features, specifications and appearance are subject to change without notice.

www.jblpro.com

Version: 01-09-2026